

**★ KHJ-Explosion Proof Light** 



## Features and benefits

- 1.Energy saving. Reduce the number of luminaires you need, providing excellent efficacy-more light where you need it.
- 2.Anti-glare, reduces glare in applications where the user may have direct visual contact with the light source.
- 3. Shock- and vibration-resistant- tempered glass, reduces the risk of premature failure.
- 4.OSRAM LED source. High efficiency lumen output and high CRI.
- 5. Driver module assembly -High efficiency LED drivers are designed to provide reliable operation in even the harshest environments.
- 6.High-strength aluminum alloy enclosure, can endure 20J impact.IP66, can be used in marine and wet locations-robust construction suitable for saltwater and corrosive applications.
- 7. Ambient temperature from -45° C to 55° C.




- 1.Petroleum Industry, Petrochemical Industry, Metallurgical Industry, Power Generation Industry, Power Transmission Industry, Machine Manufacturing. etc.
- 2.Drilling platform, single point moorings, oil tanks, work over platform, production platform, field tank, manifold center, pumping station, gasoline station, transformer station, coating plant, warehouse.etc.
- 3. Group II Zone 1, Zone 21.





## ★ CHARACTERISTIC DETAILS




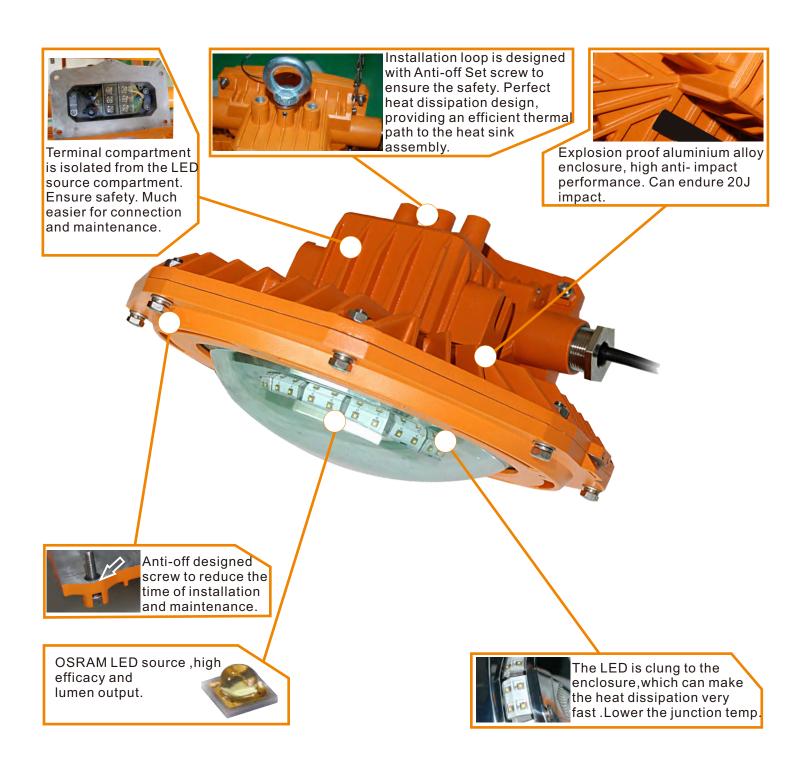

## **★** PERFORMANCE PARAMETER



## **Production Definition**

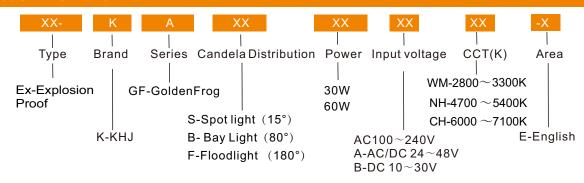

## Electrical parameter

Product type	Rated input voltage (VAC)	Rated input current (A)	Voltage frequency(Hz)	Rated power(W)	Input current(mA)	PF
Ex-KGF30	100~240	0.33~0.14	50/60	30	310	>0.98
Ex-KGF60	100~240	0.66~0.28	50/60	60	600	>0.98

## Photometric parameter


Product type	P/N	Color temp.	CCT(K)	CRI	Luminous Flux(Im)	Candela Distribution	
Ex-KGF30	Ex-KGFF30WM-E	Warm white	2800-3300	82	3080		
	Ex-KGFF30NH-E	Natural white	4700 - 5400	70	3723	A	
	Ex-KGFF30CH-E	Cool white	5400 -6400	70	4015		
	Ex-KGFB30WM-E	Warm wh ite	2800-3300	82	3080		
	Ex-KGFB30NH-E	Natural white	4700 - 5400	70	3723	В	
	Ex-KGFB30CH-E	Cool white	5400-6400	70	4015		
	Ex-KGFS30WM-E	Warm white	2800 - 3300	82	3080		
	Ex-KGFS30NH-E	Natural white	4700 - 5400	70	3723	С	
	Ex-KGFS30CH-E	Cool white	5400 -6400	70	4015		
	Ex-KGFF60WM-E	Warm white	2800-3300	82	5125	Α	
	Ex-KGFF60NH-E	Natural white	4700 - 5400	70	5720		
	Ex-KGFF60CH-E	Cool white	5400 -6400	70	6160		
Ex-KGF60	Ex-KGFB60WM-E	Warm white	2800 -3300	82	5125		
	Ex-KGFB60NH-E	Natural white	4700 - 5400	70	5720	В	
	Ex-KGFB60CH-E	Cool white	5400 -6400	70	6160		
	Ex-KGFS60WM-E	Warm white	2800 - 3300	82	5125		
	Ex-KGFS60NH-E	Natural white	4700 - 5400	70	5720	C	
	Ex-KGFS60CH-E	Cool white	5400-6400	70	6160		

## Other parameter


Product type	Size(mm)	Weight(Kg)	Ambient temp(℃)	Max surface temp. (test in 25℃)	IP code	Temp. classification	Insulation
Ex-KGF30	311*284*190	5.5	-40~+55	55	IP66	T6	I
F K0500	311*284*190	5.5	-40~+40	63. 5	IP66	Т6	I
Ex-KGF60	311*284*190	5.5	-40~+55	63. 5	IP66	Т5	I


# ★ CANDELA DISTRIBUTION



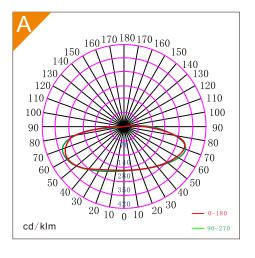



S/MHwp=2.66:1

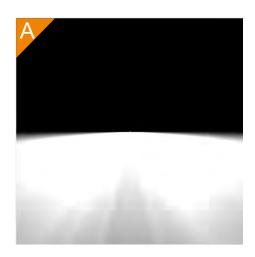

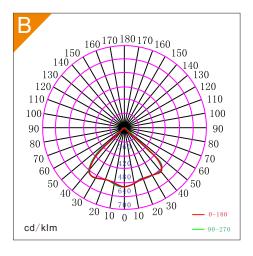


S/MHwp=1:1

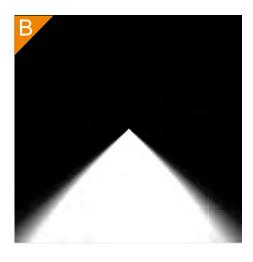

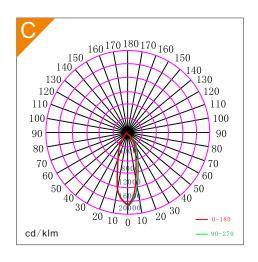






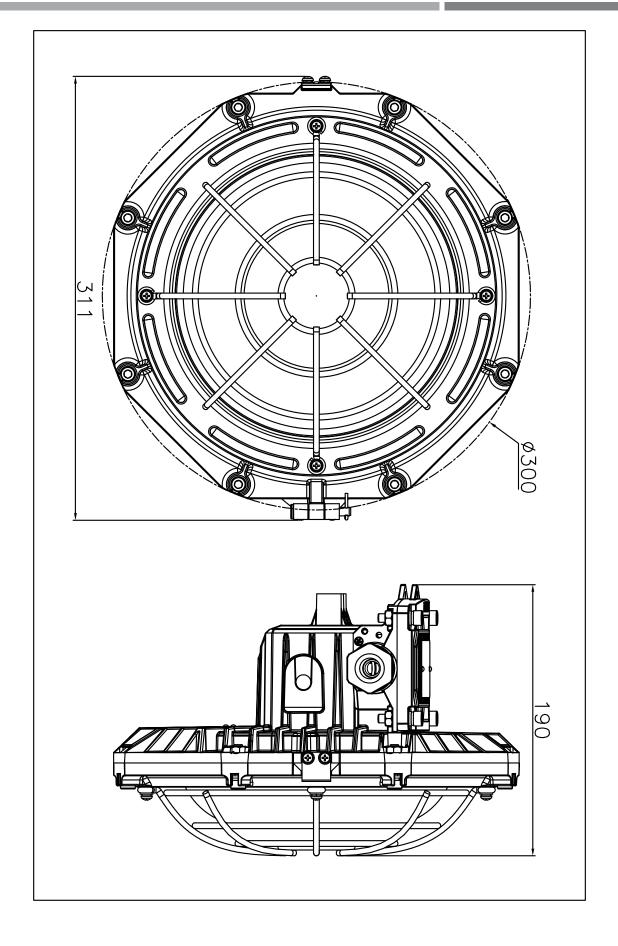


# **★** INSTALLATION METHOD




#### Installation method

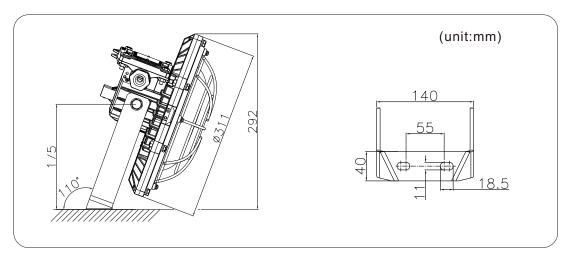

## Stanchion mount

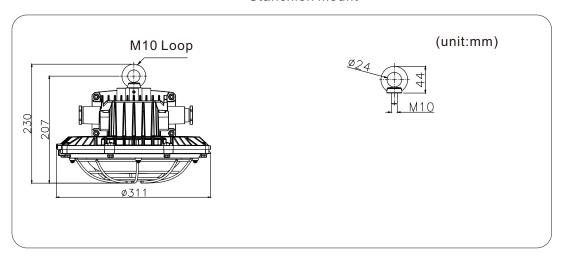

## Pendant mount

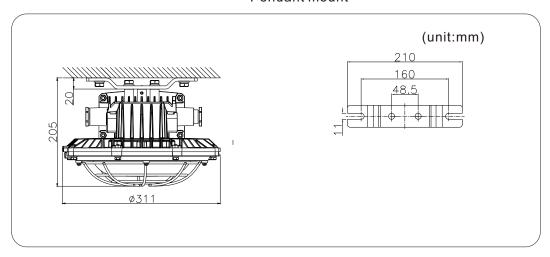

Ceiling mount

# ★ ACCESSORIES






## Optional parts

Installation accessories	Picture	Material	Weight (Unit:Kg)	QTY
Bracket	200	Q235	0.4	1
Stanchion Bracket		Q235	0.4	1
Guards		Q235	0.3	1
Loop	P	45#	0.1	1

#### Accessories

## **Stanchion Bracket**

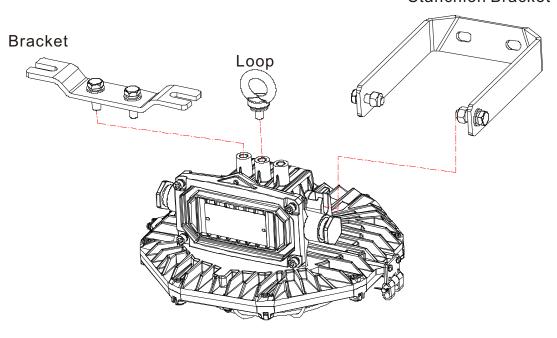

# **★** SERVICE



### Caution

- 1.To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.
- 2. To avoid electric shock:

Be certain electrical power is OFF before and during installation and maintenance.

Luminaire must be supplied by a wiring system with an equipment grounding conductor.

3. To avoid burning hands:

Make sure lens and housing are cool when performing maintenance.

- 4. To avoid explosion:
  - 1)Make sure the supply voltage is the same as the luminaire voltage.
  - 2)Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.
  - 3)Do not operate in ambient temperatures above those indicated on the luminaire nameplate.
  - 4)All gasket seals must be clean.
  - 5)Before opening, electrical power to the luminaire must be turned off. Keep tightly closed when in operation.

## Package Check

- 1. Check the carton and all the components according to the packing list.
- 2. Make sure the product is in good conditions.

#### Transportation

Please keep this product from heavy mechanical shock, exposure to strong sunshine, throwing, rolling and stress during transport.

#### Storage

Kept in dry, clean and well-ventilated , non-corrosive medium warehouse, the ambient temperature should be -40° $\mathbb{C}$  to 55° $\mathbb{C}$ .

### After-sales service

Installation and maintenance must be according to the instruction.

If customer can not deal with it by themselves ,please contact with sales department.

## Contact

## SHENZHEN KHJ SEMICONDUCTOR LIGHTING CO., LTD.

Address: 4-5 Floor, Building 7, Huang BeiLing Jing Xuan Industrial park, No. 2 Dong Huan Rd, Yousong, Longhua new District, Shenzhen China.

Tel: +86-755-33953361 Fax: +86-755-28030133 E-mail: khjledsales@khj.cn Web: www.khjled.com

