

E3



12134E00

- > Enclosure in robust polyamide
- > A switch incorporated into the socket body ensures safe operation
- > Handy hanging loop



**WebCode 8575A**

ATEX / GOST						NEC 505						NEC 506						NEC 500																						
						Class I												Class I						Class II						Class III										
Zone	0	1	2	20	21	22	Zone	0	1	2	20	21	22	Division	1	2	1	2																						
For use in		x	x				For use in		x <sup>1)</sup>	x <sup>1)</sup>				For use in		x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>																			

<sup>1)</sup> Canada


**Selection Table**

Version	No. of poles	Voltage [V]	Colour code	Frequency [Hz]	h	Order number	Art. no.	PS	Weight kg
16 A coupler	2 P Extra-low voltage	20 ... 25	violet	50 and 60	--	<b>8575/14-100</b>	<b>151598</b>	10	0.580
		40 ... 50	light grey	50 and 60	12	<b>8575/14-112</b>	<b>151611</b>	10	0.580
	3 P Extra-low voltage	20 ... 25	violet	50 and 60	--	<b>8575/14-200</b>	<b>151583</b>	10	0.600
		40 ... 50	light grey	50 and 60	12	<b>8575/14-212</b>	<b>151591</b>	10	0.600
	3 P (2 P + $\neq$ ) Low voltage	200 ... 250	blue	50 and 60	6	<b>8575/14-306</b>	<b>151481</b>	10	0.770

**Technical Data**

Explosion protection Europe (ATEX) Gas	PTB 01 ATEX 1044 ⊕ II 2 G Ex de IIC T6 (Ta = - 30 ... + 45°C) ⊕ II 2 G Ex de IIC T5 (Ta = - 30 ... + 55°C)
Certificates and approvals Certificates	ATEX, Brazil (UL do Brasil), China (CQST Ex), Canada (CSA), Kazakhstan (GOST-K), Russia (GOST-R), Belarus (GOST-B)
Rated current	16 A
No. of poles	2 P, 3 P
Cable entry	11 ... 21 mm cable diameter

**Dimensional Drawings** (All Dimensions in mm) - Subject to Alterations

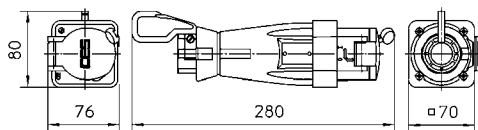

03209E00

8575/14 Coupler 16 A