




Features

- ▶ well designed weatherproof telephone for industrial and general applications
- ▶ for out- and indoor use with tough operating demands (eg. sea water, high humidity, dust, strong mech. stress etc.)
- ▶ housing made of impact resistant polycarbonate
- ▶ protection door in yellow or transparent - protects against pollutions etc.
- ▶ eye-catching signal colour yellow - easy recognition of telephone
- ▶ connection possibility with secondary signalling sounder
- ▶ models with visual call indicator (LED)
- ▶ high degree of protection IP 66








Technical data

General data	wIND
Housing, colour	polycarbonate, yellow
Weight	~ 2,3 kg (incl. telephone bracket)
Receiver inset	dynamic receiver
Transmitter capsule	electret foil microphone

Connection data	
Supply voltage	24 – 66 V DC
Supply current	0,019 – 0,10 A
Ringling alternating current	30 – 90 V AC at 16 - 68 Hz call frequency
Sounder output impedance	≥ 6,0 kΩ at 25 Hz, ≥ 3,5 kΩ at 50 Hz
Dialling procedure	DTMF - frequencies acc. to ITU-T Q.23 - tone duration unlimited or 90 ms PD - pulse/pause ratio 1,5:1 (60/40 ms) or 2:1 (66.7/33.3 ms)
Ringling sound pressure level	~ 90 dB (A) in 1 m (with protection door open) ~ 65 dB (A) in 1 m (with protection door closed)
Inquiry key (flash)	only for DTMF 80ms, 120ms, 600ms
Operation position	wall mounted
Terminals	single or fine wire up to 2,5 mm ²
Cable entry	cable gland 2xM16x1,5 for cable 5-9 mm
Operating temperature	-25 °C to +55 °C
Storage temperature	-25 °C to +70 °C
Protection class	IP 66 (with closed protection door)
Power cable	TCP/La, TCP/Lb
Secondary tel. sounder	w1, w

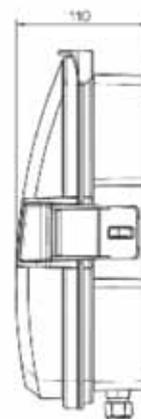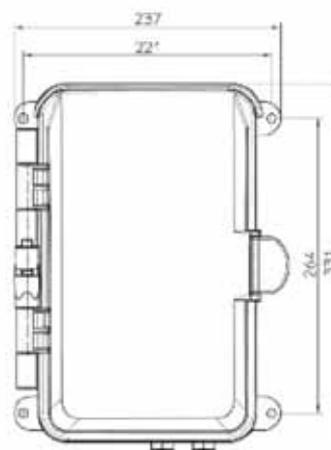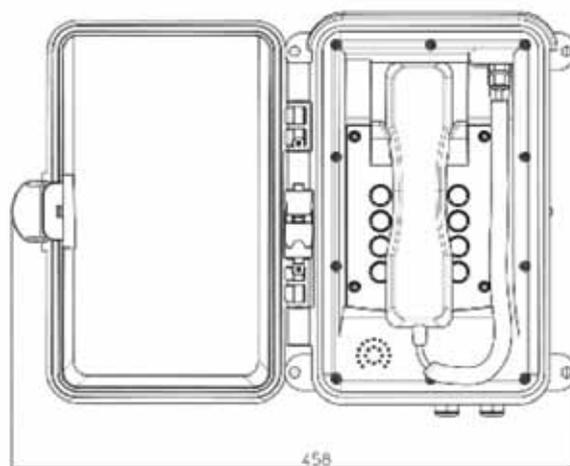

Order data

Type	Order No.	Denomination
wIND1	410 700 100	Weatherproof telephone INDUSTRY yellow, with protection door, yellow
	410 700 110	Weatherproof telephone INDUSTRY yellow, with protection door, transparent
	410 710 100	Weatherproof telephone INDUSTRY yellow, without keypad, with protection door, yellow
	410 710 110	Weatherproof telephone INDUSTRY yellow, without keypad, with protection door, transparent
Models with visual call indicator (LED)		
wIND2	410 700 200	Weatherproof telephone INDUSTRY yellow, with protection door, transparent and with visual call indicator (LED)
	410 710 200	Weatherpr. telephone INDUSTRY yellow, without keypad, with protection door, transparent, visual call indicator (LED)