

CE

INDUPHONE WP SERIES WEATHER-PROOF IP66/67 PHONE HANDSET / KEYPAD

To be safe to be on time.

DESCRIPTION

The A2S 'INDUPHONE WP' series is made for environments that need a telephone which can withstand rough usage and treatment features.

The telephone is well suited for heavy duty usage due to the thick aluminum material body (Housed in robust aluminum die case with spring loaded door as demand), and very high ingress protection (IP-67). The station provides high quality conversations, using HD Voice and A2S 's superb audio technology such as active noise filtering, echo cancellation, wide band audio codec and high power audio outputs.

The telephone with two available type : Standard Analogue and SMART VoIP-SIP protocol.







FEATURES

- Four variants: Full keyboard and hotline (no keyboard), both with or without door
- Made for critical communication in rough environments like roads, tunnels, ships
- Extremely water and dust resistant (IP67)
- Very durable with 5 mm aluminum casing and stainless steel components
- Magnetic reed hook-switch ensures minimal wear and tear
- Hearing Aid compatible receiver, Noise canceling microphone
- Last number redial
- Adjustable ringer and volume control
- Option for GSM cellular connectivity
- Support local power and Power over Ethernet (PoE)



Advantages

- Weather proof
- Vandal resistant
- Heavy duty
- Easy installation




Antec Supplies Services

23 rue du tunnel 75019 PARIS FRANCE Tel.: +33 (0)1 43 00 58 47

Body Material / Colour	Robust Aluminium Alloy / Yellow (Blue & Red on demand)
Handset material / color	Robust handset c/w curly cord or armoured stainless steel
Cable connection	By one Stainless steel cord or two cable glands
Door cover	Orient automatically/good self - closing
Mounting	On wall
Redial	Last number
Electronic Bell	90dB at 1 m.
Visual calling signal	On require
Keypad	Full keypad with memory, 10 button programmable
Noise cancelling	Noise canceling Micro
Hook	Magnetic
Conversation Mode	By handset
Volume	Adjustable ringer and volume control
Memory	Available for dialing 12 groups of numbers stored

Direct current supply	48 to 60 Vdc
Consumption	< 40mA
Ringing voltage	35 – 80 Va
Frequency	697/770/852/941Hz
Dialling	DTMF / decimal
Dimensions	320×205×120mm
Weight	5.5 kg
IP-rating	IP66/67
Relative humidity	10% ~ 95%
Atmospheric pressure	86 ~106Kpa
Circumstance noise	≤ 60dB (A)
Max./min.amb.Temp	-30°C to 75°C

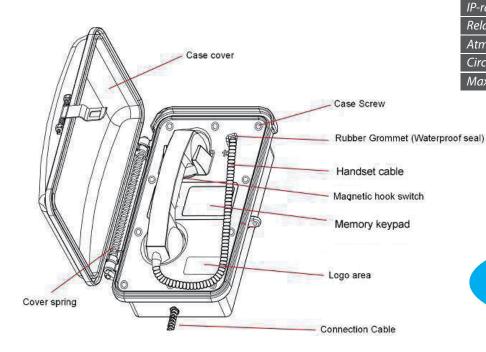

Guarantee 12 Months from the date of shipment

ORDER NUMBER	DESCRIPTION
INDUPHONE – T101E000	Analogue type with keypad, handset and case cover
INDUPHONE – T101E001	Analogue type with handset and case cover, without keypad
INDUPHONE – T101E002	Analogue type with keypad and handset, without case cover
INDUPHONE – T101E003	VoIP type phone with keypad, handset and case cover
INDUPHONE – T101E004	VoIP type phone with handset and case cover, without keypad
INDUPHONE – T101E005	VoIP type phone with keypad and handset, without case cover

Housing Color'X': Y = Yellow; R = Red; B = Blue;

contact@a2s-antec.com